

**COMPLIANCE TESTING REPORT FOR  
AUSTRALIAN STANDARD AS/CA S008:2010  
INCLUDING AMENDMENT No 1/2014  
REQUIREMENTS FOR CUSTOMER CABLING PRODUCTS**

Client:	Dahua Technology Australia Pty Ltd.
Address:	Unit 8, 39 Herbert Street, Artarmon, NSW 2064, Australia
Report Number:	0825DAHDDH-PFM920I-6UN-C_S008
Date of Testing:	19 <sup>th</sup> August 2020
File Number:	DAH200612
Product Name:	UTP CAT6 Cable
Brand Name	Dahua
Product Model No:	DH-PFM920I-6UN-C
Product Description:	UTP CAT6 Cable
Result:	<b>Complies</b>
Compiled by:	Nina Rodoreda Testing Engineer
Reviewed by:	Philip Hitchcock Testing Engineer
Date of Issue	25 <sup>th</sup> August 2020

Results appearing herein relate only to the sample(s) tested.  
This report may not be reproduced in any form unless done so in full.

This report is issued errors and omissions exempt and is subject to withdrawal at Austest Laboratories discretion.

**\* Refer to summary page for any conditions.**

This report is issued within the scope of A2LA accreditation #2765.02

Accredited for compliance with ISO / IEC 17025.  
Approval Specialists Pty Ltd (ACN: 094 656 354) Trading as Austest Laboratories  
2 Brex Court, Reservoir Victoria 3073 Australia. Ph: +613 9464 4016



## **SUMMARY OF COMPLIANCE WITH AUSTRALIAN STANDARD** **AS/CA S008:2010 (Including Amendment No 1/2014)**

The UTP CAT6 cable was supplied for AS/CA S008:2010 testing by Dahua Technology Australia Pty Ltd. of Artarmon, NSW 2064, Australia.

The Equipment Under Test (EUT) consisted of a length of CAT6 data cable. The cable was 4 twisted pair construction. The conductors were solid copper. The nominal diameter of each conductor was 0.53 mm. The conductors were insulated with High Density Polyethylene (HDPE). The cable contained a Polyester Rip Cord and Polyethylene Separator. The sheath was Polyvinyl Chloride (PVC). Please also refer to the photo in Appendix, at the rear of the report.

The EUT had the following sheath markings:

ZEHJIANG DAHUA VISION TECHNOLOGY CO.,LTD. DH-PFM920I-6UN-C UTP CAT6  
PVC 4PAIRS CPR EN 50575 Eca CERTIFIED Q/DXJ 067-2019 TD 2020/06/13 XXXm

The requirements for labelling cable and cable products are specified in the ACMA Telecommunications Cabling (Customer Equipment and Customer Cabling) Notice.

The UTP CAT6 cable **COMPLIES** with the tested clauses of AS/CA S008:2010.

### **SPECIAL CONDITIONS FOR COMPLIANCE:**

**The cable must comply with Clause 5.6.3 requirements for insulation and sheath materials.**

This cable is compliant for indoor use only.

### **Possible Test Case Verdicts:**

- test case does not apply to the test object .....N(.A)
- test object does meet the requirements .....P(ass)
- test object does not meet the requirements .....F(ail)
- testing was not performed.....NT
- noted.....ND

This report is issued within the scope of A2LA accreditation #2765.02

AS/CA S008:2010			
Clause	Requirement - Test	Result - Remark	Verdict
5.	REQUIREMENTS		P
5.1	GENERAL Cabling products shall be physically distinguishable from products used for distribution or connection of AC mains supply.		P
5.2	MARKINGS		P
5.2.1	Labelling Notice		ND
5.2.2	Inappropriate markings Cabling products intended solely for telecommunications use shall not bear markings indicating hazardous services.		P
5.2.3	Additional markings (excluding cable markings)		N
5.2.3.1	International protection (IP) rating		N
5.2.3.2	Multidiscipline telecommunications connecting hardware		N
5.3	UNDERGROUND CONDUIT		N
5.4	CABLE DISTRIBUTION DEVICES		N
5.5	OPTICAL FIBRE DISTRIBUTION DEVICES AND ENCLOSURES Optical fire distribution devices and splice enclosures shall comply with AS/NZS 2211.1		N

This report is issued within the scope of A2LA accreditation #2765.02

Accredited for compliance with ISO / IEC 17025.  
 Approval Specialists Pty Ltd (ACN: 094 656 354) Trading as Austest Laboratories  
 2 Brex Court, Reservoir Victoria 3073 Australia. Ph: +613 9464 4016



AS/CA S008:2010			
Clause	Requirement - Test	Result - Remark	Verdict
5.6	CABLES		P
5.6.1	General A customer cable shall meet the requirements of Clauses 5.6.2 to 5.6.9 where specified in Clauses 5.6.10 to 5.6.18 of this Standard.		P
5.6.2	Conductor and optical fibre identification Shall use a system of identification such that all conductors, coaxial tubes or optical fibres within the cable are readily distinguishable visually from one another.	4 twisted pairs. Pairs are identified as: Blue, orange, green and brown. The matching mate in the twisted pair is white insulation with a matching coloured stripe.	P
5.6.3	Insulation and sheath material		NT
	(a) shall use insulation and sheath materials suitable for telecommunications purposes;	HDPE insulation PVC sheath	ND
	(b) Where PVC insulation or sheath materials are used, they shall comply with the requirements of Table 1 or 2, as applicable: and		NT
	Table 1 - PVC Insulation Requirements Tensile strength (unaged): 13 MPa Elongation (unaged): 100% Elongation (Aged): 50% of initial after 100C at 120h Volatile Loss: 20 g/m <sup>2</sup> after 80C aging for 120h Volume Resistivity: 400GΩ m at 23C, 0.4GΩ m at 60C		N
	Table 2 - PVC Sheath Requirements Tensile strength (unaged): 12 MPa Elongation (Unaged): 100% Elongation (Aged): 50% of initial after 100C at 120h Volatile Loss: 20 g/m <sup>2</sup> after 80C aging for 120h		NT
	(c) Where non-PVC insulation or sheath materials are used, they shall comply with the requirements of AS 1049 for-		NT
	(i) Tensile Strength Test (Aged/Unaged);		NT
	(ii) Elongation Test (Aged/Unaged); and		NT
	(iii) Shrinkback Tests for that particular type of insulation and sheath.		NT

This report is issued within the scope of A2LA accreditation #2765.02

Accredited for compliance with ISO / IEC 17025.  
 Approval Specialists Pty Ltd (ACN: 094 656 354) Trading as Austest Laboratories  
 2 Brex Court, Reservoir Victoria 3073 Australia. Ph: +613 9464 4016



AS/CA S008:2010			
Clause	Requirement - Test	Result - Remark	Verdict
5.6.4	<b>Flammability</b> A cable that is required to comply with this Clause shall pass the combustion propagation test of Method 5.6 including Appendix A and B of AS 1660.5.6.	Refer to table in Appendix A.	P
5.6.5	<b>UV resistance</b> Requirements of AS 1049 for cables exposed to UV radiation.		N
5.6.6	<b>Metallic conductors</b>		P
5.6.6.1	<b>Conductor composition</b> Any metallic conductors, other than copper-clad steel used as an inner conductor in coaxial cable, or copper-clad aluminium with a centre conductor greater than 2mm used as an inner conductor in coaxial cable- <ul style="list-style-type: none"> <li>(1) shall be either plain or plated copper;</li> <li>(2) may be either a single, solid conductor or multi-stranded;</li> <li>(3) the DC resistance shall be less than the values given in Table 3; and</li> <li>(4) the conductor finish should be plain or tinned</li> </ul>	Requirement: 85.4 $\Omega$ /km max.  Measured: 79.1 $\Omega$ /km  Solid plain copper diam. = 0.53mm All pairs measured and average calculated.	P
5.6.6.2	<b>Electrical withstand voltage</b> A multi-conductor cable that is required to comply with this Clause by any of Clauses 5.6.10 to 5.6.18 of this Standard, when tested at a frequency of 50 Hz on at least 1 m length; <ul style="list-style-type: none"> <li>(a) shall be able to withstand the appropriate AC voltage levels and test method listed in Table 4, without breakdown for a period of 60 s or a period of 2 s as stated; and</li> <li>(b) for Test 2 and 3, all cables/cordages shall comply to the Table 4 limits using the test specified in AS/NZS 3191 Table 2.1, test number 8(a), and using test method referred in Clause 3.5.1 of AS/NZS 1660.3.</li> </ul>		P
5.6.6.3	<b>Mutual capacitance</b> <ul style="list-style-type: none"> <li>(a) The maximum mutual capacitance between the two wires forming a pair measured at any frequency in the range 800 Hz to 1000 Hz shall not exceed the relevant value given in table 5.</li> <li>(b) The measurement, referred to in Clause 5.6.6.3 (a) shall be performed on a minimum cable length of 100m</li> <li>(c) The mutual capacitance shall be corrected to a length of 1000m</li> </ul>	Requirement: 80 nF/km max.  Measured: 51.7 nF/km	P

This report is issued within the scope of A2LA accreditation #2765.02



AS/CA S008:2010			
Clause	Requirement - Test	Result - Remark	Verdict
5.6.6.4	<p>Capacitance unbalance</p> <p>(a) The maximum capacitance unbalance between pairs measured at any frequency in the range 800 Hz to 1000 Hz shall not exceed the relevant value given in Table 5.</p> <p>(b) During the measurement referred to in Clause 5.6.6.4 (a), all conductors, other than those under test and the metallic shield (where applicable) shall be connected to earth.</p> <p>(c) The measurement shall be performed on a minimum cable length of 100m.</p> <p>(d) The capacitance unbalance between two pairs of wires with one pair designated 'A' and 'B' and the second pair designated 'C' and 'D'.</p> <p>(e) The capacitance unbalance shall be corrected to a length of 500m.</p>	<p>Requirement: 300 pF per 500m max.</p> <p>Measured: 44.7 pF per 500m</p>	P
5.6.6.5	<p>Insulation resistance</p> <p>(a) shall not be less than the relevant value given in Table 5;</p> <p>(b) the measurement shall be made on a minimum length of 100m of cable or cordage at a potential of 500Vd.c. <math>\pm</math>50Vd.c. and the reading taken after the application of the voltage for 60s; and</p> <p>(c) the insulation resistance shall be corrected to a length of 1000m.</p>	<p>Requirement: 1000 M<math>\Omega</math>/km min</p> <p>Measured: &gt; 1000 M<math>\Omega</math>/km</p>	P
5.6.7	<p>Metallic shield</p> <p>(a) any shield provided in the cable shall be electrically continuous; and</p> <p>(b) Where a foil shield is employed, a drain wire shall be placed in continuous contact with the metallic surface of the shield.</p>		N
5.6.8	<p>Water penetration test</p> <p>Water Penetration specified in Clause 25, Method-F5B of IEC 60794-1-2.</p>		N
5.6.9	<p>Integral bearer or strengthener</p>		N
5.6.10	<p>Cable with specific attributes</p> <p>Where a cable is claimed to have specific attributes, such as rodent or termite resistance or armouring strength, evidentiary documentation shall be made available on request to support the claim.</p>		N

This report is issued within the scope of A2LA accreditation #2765.02





AS/CA S008:2010			
Clause	Requirement - Test	Result - Remark	Verdict
5.6.11	Metallic paired cable		P
5.6.11.1	General requirements Metallic paired cable, other than cordage, a cord or a special application cable, shall comply with the following Clauses: 5.6.2, 5.6.3, 5.6.4, 5.6.5, 5.6.6.1, 5.6.6.2, 5.6.6.3, 5.6.6.4, 5.6.6.5, 5.6.7, 5.6.8 and 5.6.9.		P
5.6.11.2	Construction A cable intended to carry a frequency of 300 Hz or greater shall be shielded or of twisted pair construction.		P
5.6.12	Cordage with metallic conductors		N
5.6.13	Cords with metallic conductors		N
5.6.14	Metallic jumper wire and jumper cable		N
5.6.15	Coaxial cable		N
5.6.16	Optical fibre cable		N
5.6.17	Blown fibre tube systems		N
5.6.18	Special application cables		N
5.7	CONNECTING HARDWARE, INCLUDING PLUGS AND SOCKETS OF ALL DESIGNS		N
5.8	CABLING PRODUCTS FOR UNDERGROUND AND AERIAL INSTALLATIONS		N

**\*\*\*\* END OF REPORT BODY \*\*\*\***

**Appendix A – Additional Test Data**  
**Appendix B – Photographic Record of Sample**

This report is issued within the scope of A2LA accreditation #2765.02

Accredited for compliance with ISO / IEC 17025.  
 Approval Specialists Pty Ltd (ACN: 094 656 354) Trading as Austest Laboratories  
 2 Brex Court, Reservoir Victoria 3073 Australia. Ph: +613 9464 4016



### Appendix A – Additional Test Data

5.6.4		TABLE: Flammability Test								P
No	Object	Duration of application of flame (S)	Time object remained alight after removal of flame (S)	Time until ignition of tissue paper (S)	Time until ignition of particle board (S)	Ignition of tissue paper	Particle board scorching	Extent of burning upwards (mm)*	Extent of burning downwards (mm)*	Result
1	Blue Cat6 Cable	60 sec	42 sec	NI	NI	NI	NI	380 mm	495 mm	Pass

\* Measured from lower edge of upper clamp. Start of burn was 475 mm from upper clamp. Limit for upward burn is > 50 mm and limit for downward burn is <540 mm from upper clamp (AS 1660.5.6).


LEGEND	
P	Pass
F	Does not comply
NA	Not applicable
NI	No ignition

**NOTE:**

**INDIVIDUAL ITEMS OF THIS TEST REPORT SHOULD NOT BE QUOTED IN ISOLATION AS PROOF OF PRODUCT ACCEPTABILITY NOR APPLIED TO DIRECTLY ASSESS PERFORMANCE UNDER CONDITIONS OTHER THAN AS ENVISAGED BY THE REFERENCE SPECIFICATION, E.G. INDIVIDUAL FIRE TESTS TO PROVE AN OVERALL ACCEPTABLE FIRE HAZARD LEVEL.**



**Appendix B – Photographic Record of Sample**

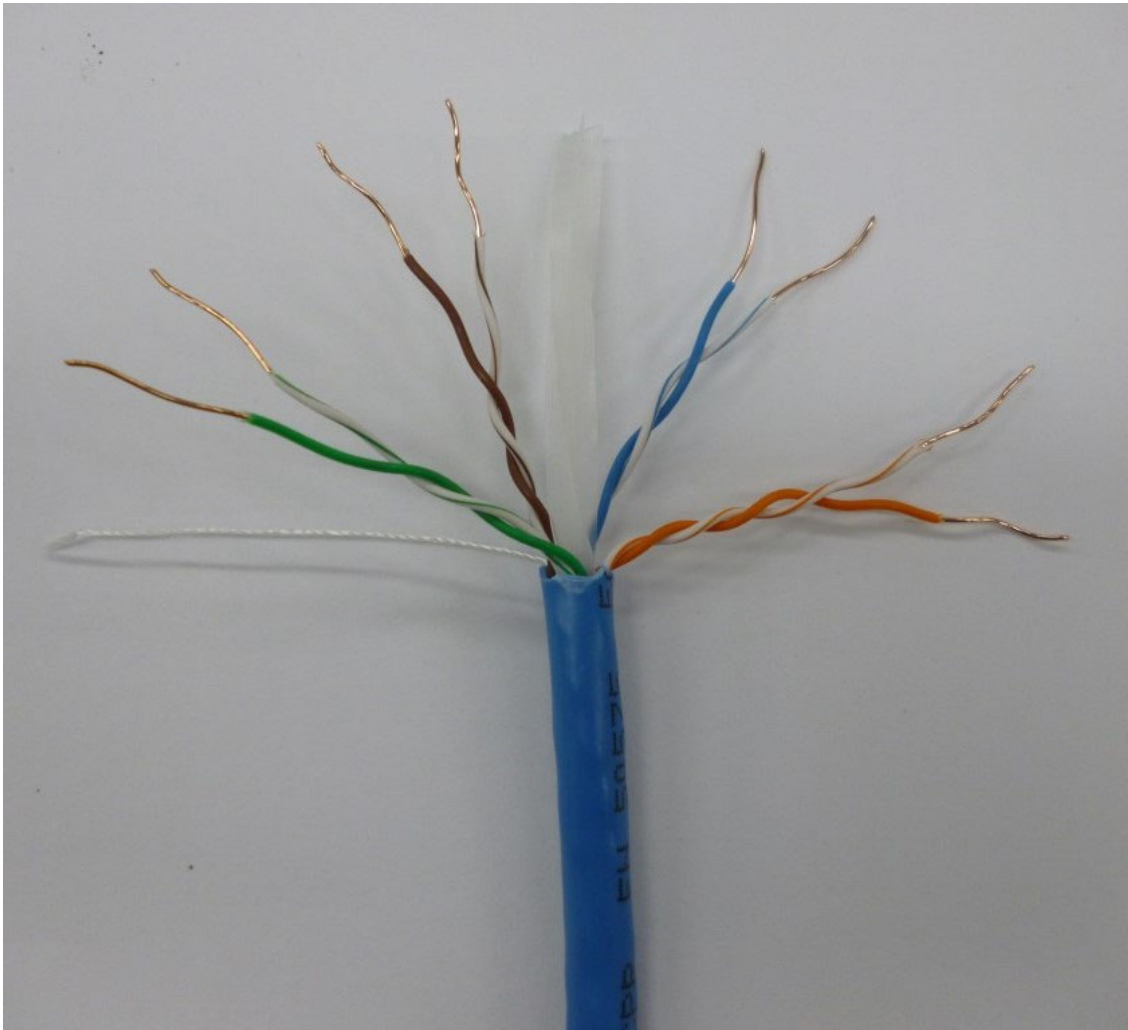

This report is issued within the scope of A2LA accreditation #2765.02

Accredited for compliance with ISO / IEC 17025.  
Approval Specialists Pty Ltd (ACN: 094 656 354) Trading as Austest Laboratories  
2 Brex Court, Reservoir Victoria 3073 Australia. Ph: +613 9464 4016

